


# SUNPOWER

## CryoTel® DS 30

32 W Cryocooler

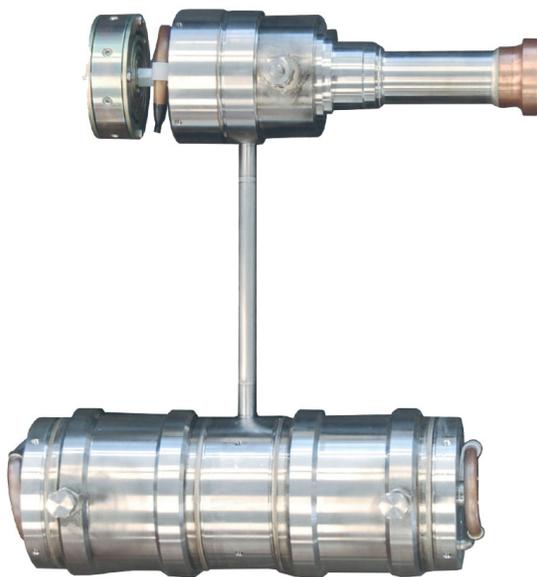

Nominal Heat Load @ 77 K (23° C reject)	32 W
Nominal Input	480 W
Cooler Mass	6.4 kg
Temperature Stability	± 0.1 K
Power Supply	DC 48V (19A)
Length	Cold Head: 232 mm Wave Generator: 244 mm
Diameter	Cold Head: 73 mm Wave Generator: 92 mm
Lowest Temperature	< 36 K
Orientation	any
AVC Compatible	yes
Operating Frequency	64 Hz
MTTF	> 200,000 hr

The CryoTel® DS30 cryocooler offers efficient, reliable and compact cooling to the market in the temperature range of 35 to 250 Kelvin. The DS30 was optimized for applications in which SWAP (size, weight and power) and reliability are concerns. The DS30 consumes considerably less power than other cooling alternatives and requires no maintenance, making it ideal for strategic as well as industrial applications. The DS30 also delivers outstanding performance with a Mean Time to Failure of >200,000 hours.

